

Mostec AG
Mess- und Regeltechnik
Lausenerstrasse 13a
CH-4410 Liestal, Switzerland

Tel. + 41 61 921 40 90
Fax + 41 61 921 40 83
Internet www.mostec.ch
E-Mail info@mostec.ch



Programmable universal digital display Type M2229

Input signals:

M2229-A

Current/Voltage

M2229-T

Temperature sensor

Optional input signals:

pH

Conductivity

Frequency



Technical description

The digital display M2229 is used to check or control any type of signal current or voltage. It converts the input signal to an internal standard signal of for example 0 to 100.0%. In this range two alarm contacts can be set independently. A 4-digit LED display shows the actual value and setpoints or alarm values in the range of -1999 to 9999 units.

All settings as alarm values, hysteresis, range and operating mode of the floating contacts can be set with a link cable, connected to a personal computer or a laptop.

Both alarm contacts can also be programmed with tiny push button switches.

A typical application would be to measure and monitor pressure in a process vessel. The pressure transmitter converts the pressure of 1 to 10 bar to a current signal of 4 to 20mA. The M2229 monitors under and overpressure in the vessel. It converts the 4... 20mA signal current to 0...100.0%. The alarm is set between 0% (=1 bar) and 100.0% (=10 bar). With these floating alarm contacts, overpressure valves, compressors, etc. are driven directly.

Optionally, a galvanic isolated output signal of 0...20mA or 4...20mA is available.

Power supply:

Universal supply 20 to 253VAC/DC

Technical Data:

Input signal: M2229-A: 0/4...20mA/0...1V and 10V, programmable
M2229-T: Platinum-/nickel, with 100,200,500 or 1000 at 0°C (DIN 43 760),
in 2- or 3-wire connection
current signal=51 , voltage signal=1M

Input load / impedance: 24VDC max. 25mA
2-Wire transmitter supply: 4-digit, LED red, 14.2 mm
Display: -1999...9999
Display range: ±0.1% at 23°C ambient temperature
Accuracy: ±0.1%
Reproducibility: zero drift: 30ppM/°C typical,
Temperature coefficient: gain drift: 25ppM/°C typical
±0.1%

Long-term stability: -5 to +45°C
Working temperature range: 95%, non-condensing
Maximum humidity: by computer programmable, see manual
Range adjustment: by computer programmable, see manual
Zero-/Gain adjustment: by computer programmable, see manual
Option alarm contacts: two, adjustable between 0,0 and 100,0%
Hysteresis: by computer programmable, factory set: ±5 digit, see manual
Contacts: floating change over contacts
Max. contact load: 1A/230V resistive
Change alarm contacts: by button switches or computer programmable, see manual
Display alarm contacts: by button switches or computer programmable, see manual
Mode of the alarm contacts: with two red LED-Lamps
Display unit: with one red LED-Lamp
Option signal output: 0/4...20mA, galvanically isolated
Max. load: 500
Output impedance: >1M typical
Power supply: 20 to 253VAC or DC
Power supply load: 4.5 to 7.0W at 230VAC
CE-conformity: fulfilled
Terminals: plug-in screw terminals
Terminal description: 1 = supply voltage: AC~/DC(+)
2 = supply voltage: AC~/DC(-)
3 = supply voltage: PE
4 = signal output (+)
5 = signal output (-)
6 = signal output PE
7 = not used
8 = 2-Wire transmitter supply +24V
9 = signal input (-) / Sensor (-)
10 = signal input voltage (+) / Sensor (+)
11 = signal input current (+) / Sensor (-) Sense
12 = alarm contact 1, n.o. contact
13 = alarm contact 1, c.o. contact
14 = alarm contact 1, n.c. contact
15 = alarm contact 2, n.o. contact
16 = alarm contact 2, c.o. contact
17 = alarm contact 2, n.c. contact


c.o.= change over
n.o.= normally open
n.c.= normally closed

Mounting: 2 mounting clamps
Weight: 200g
Warranty: 2 years
Options: - USB programming unit for MOSTEC devices with cable and software
- Other input signal


How to order example 1: M2229-ARS (A= input for current/voltage, R= alarm contacts, S= signal output),
input 4...20mA, display 50...100,0%, SP1=2,00bar, SP2=9,50bar, hysteresis ±2digit,
current output: 50...100,0% = 0...20mA

How to order example 2: M2229-T (T= input for temperature)

Pressure control:

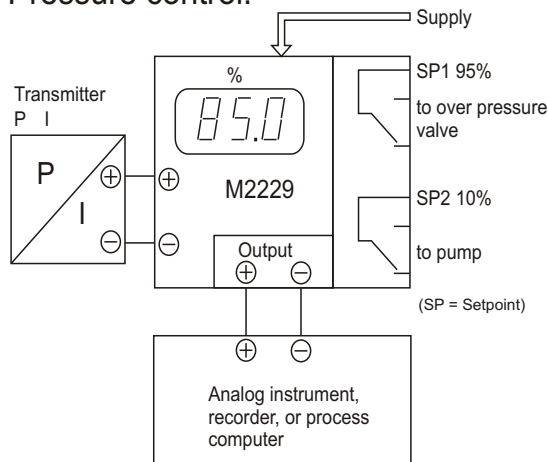

Dimensions (mm):

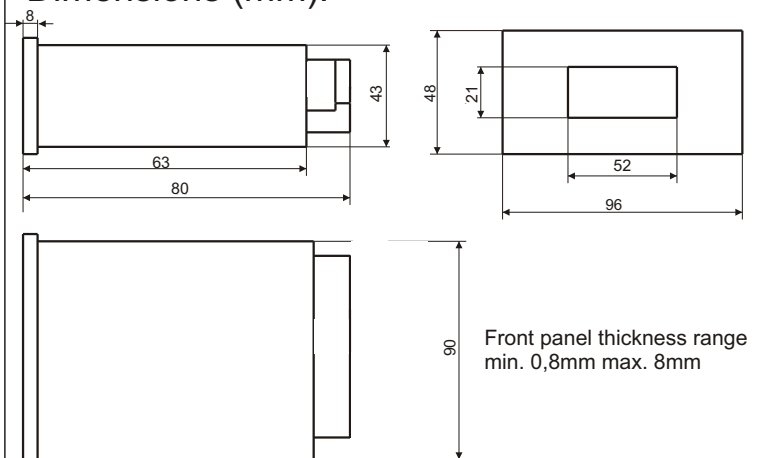

MOSTEC

Mess- und Regeltechnik
Lausenerstrasse 13a
CH-4410 Liestal
Switzerland
Tel. +41 61 9214090
Fax +41 61 9214083

